

Solargiga Energy

# Giga Sup7

JMPV-X6/54-420~430(R)

MONO-CRYSTALLINE CONVENTIONAL HALF-CUT MODULE

Maximum Power	Maximum Efficiency	Power Tolerance
430W	22.02%	0~+5W



## CELL TYPE

N-Type/MBB/Monocrystalline/Half-Cell



## HIGH EFFICIENCY, HIGH GENERATION

Based on 182mm wafer and TOPCon cell technology, the power generation efficiency has greatly improved with lower degradation and better temperature coefficient.



## EXCELLENT ANTI-PID PERFORMANCE

Cell manufacturing technology optimization and materials control will help reduce PID degradation rate to the minimum.



## SUPPORT 1500V SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.



## STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.



IEC 61215 / IEC 61730

IEC 62804: Anti-PID Test

IEC 61701: Salt Spray Test

IEC 62716: Ammonia Corrosion Test


IEC 60068-2-68 : Dust and Sand Test

12 YEARS

Product Warranty

25 YEARS

Power Output Warranty

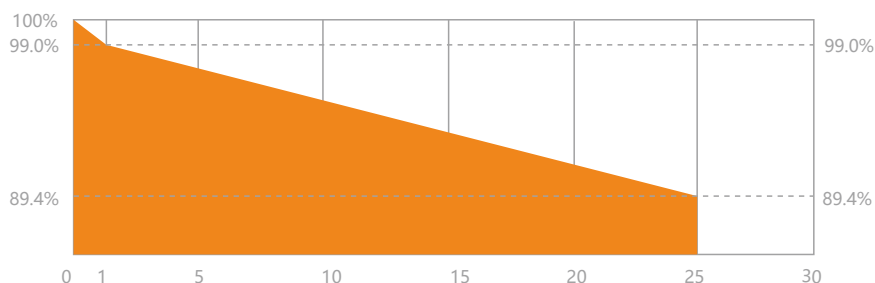

# PICC

ADDITIONAL PREMIUM INSURANCE SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ('Solargiga Energy', HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.

# MBB MONO-CRYSTALLINE CONVENTIONAL HALF-CUT MODULE

## JMPV-X6/54-420~430(R)

MODEL NUMBER	JMPV-X6/54-420~430(R)		
<b>ELECTRICAL PARAMETERS (STC)</b>			
Max Power (Pmax/W)	420	425	430
Max Power Voltage(Vmp/V)	32.34	32.52	32.73
Max Power Current (Imp/A)	12.99	13.07	13.14
Open Circuit Voltage(Voc/V)	38.63	38.86	39.09
Short Circuit Current (Isc/A)	13.86	13.93	14.01
Module Efficiency (%)	21.51	21.76	22.02

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m, Cell Temperature 25°C

<b>ELECTRICAL PARAMETERS (NMOT)</b>			
Max Power (Pmax/W)	315.06	322.49	326.43
Max Power Voltage(Vmp/V)	30.15	30.51	30.68
Max Power Current (Imp/A)	10.45	10.57	10.64
Open Circuit Voltage(Voc/V)	36.61	37.05	37.27
Short Circuit Current (Isc/A)	11.24	11.36	11.42

NMOT(Nominal Module Operating Temperature): Irradiance 800W/m Ambient Temperature 20°C, Wind Speed 1m/s

<b>TEMPERATURE CHARACTERISTICS</b>	
Cell Operating Temperature	42.5±2°C
Temperature Coefficient of Isc	0.046%/ °C
Temperature Coefficient of Voc	- 0.259%/ °C
Temperature Coefficient of Pmax	- 0.300%/ °C



<b>MECHANICAL PARAMETERS</b>	
Cell Type	N Type/MBB/Monocrystalline/Half-Cell
Number of Cells	108 (6×9×2)
Weight	20.7±1.0kg
Dimension	1722×1134×30mm
Glass	3.2mm Tempered Coated Glass
Encapsulating Material	EVA/POE
Backsheet	fluorinated backsheet/fluoride-free backsheet
Frame	Anodized Aluminum
Junction Box	Protection Degree IP68
Cable	4.0 mm <sup>2</sup> / + 350mm, - 250mm ; or Customized Length

<b>OPERATING CONDITIONS</b>	
Max System Voltage	1500V
Operating Temperature	-40°C~+85°C
Max Series Fuse Rating	25A
Max Front Face Static Load (snow etc)	5400Pa
Max Rear Face Static Load (wind etc)	2400Pa


Installation should strictly obey the installation Manual of Solargiga Energy.

<b>PACKING INFORMATION</b>	
36pcs/pallet	936pcs/40'HQ


\*Power test uncertainty +/-3%

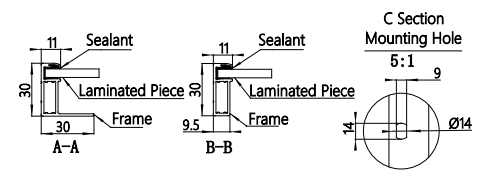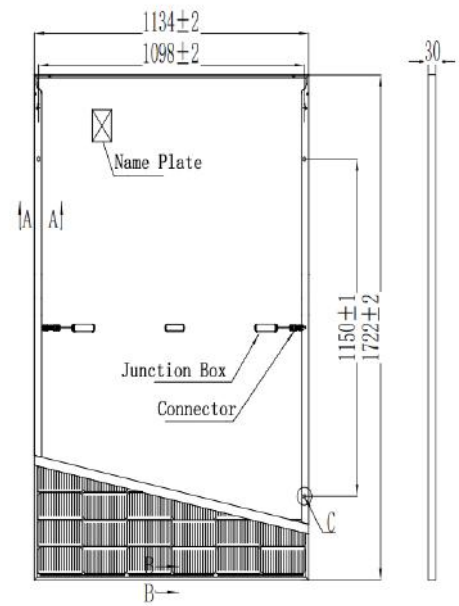

Current (A) Power-Voltage&Current-Voltage Curve (W)

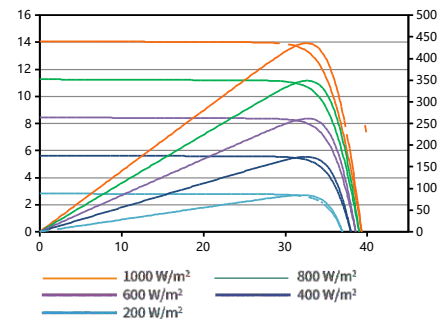

Current (A) Current-Voltage Curve

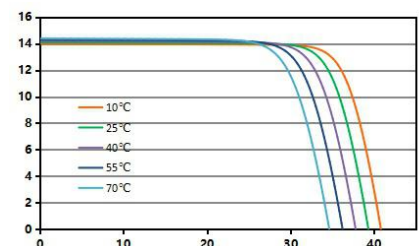

Sales HOT-line : (86)0416 508 1599  
 E-mail : sales@jz.solargiga.com  
 Xihai Industry Park, Economic and  
 Technical Development Zone, Jinzhou,  
 Liaoning Province,China.

**Note :** Electrical parameters are only used for comparison between different types of modules. Due to product innovation , Solargiga Energy reserves the right to adjust the information in this datasheet at any without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.

