

# Solargiga Energy Giga Sup7

JMPV-XVP6/72-610~620(R)

MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

Maximum Power	Maximum Efficiency	Power Tolerance
620W	22.95%	0~+5W



## CELL TYPE

N-Type/MBB/Monocrystalline/Half-Cell



## HIGH EFFICIENCY, HIGH GENERATION

Based on Monocrystalline silicon wafer and TOPCon cell technology, the power generation efficiency has greatly improved with lower degradation and better temperature coefficient.



## EXCELLENT ANTI-PID PERFORMANCE

Cell manufacturing technology optimization and materials control will help reduce PID degradation rate to the minimum.



## SUPPORT 1500V SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.



## STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.




12 YEARS

Product Warranty

30 YEARS

Power Output Warranty

IEC 61215 / IEC 61730

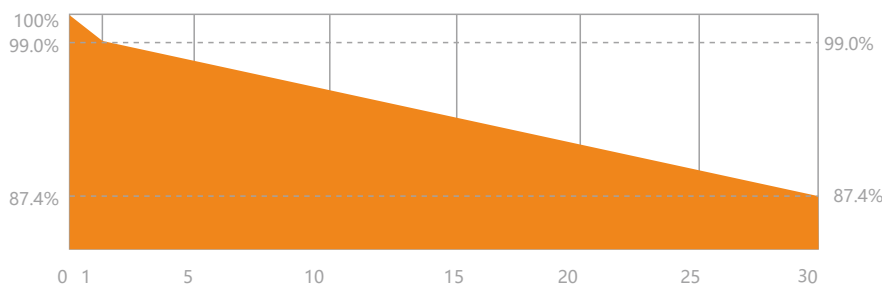

**PICC**

ADDITIONAL PREMIUM INSURANCE  
SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ('Solargiga Energy', HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.

# MBB MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE JMPV-XVP6/72-610~620(R)

MODEL NUMBER	JMPV-XVP6/72-610~620(R)		
<b>ELECTRICAL PARAMETERS (STC)</b>			
Max Power (Pmax/W)	610	615	620
Max Power Voltage(Vmp/V)	44.66	44.83	45.03
Max Power Current (Imp/A)	13.66	13.72	13.77
Open Circuit Voltage(Voc/V)	52.76	53.01	53.22
Short Circuit Current (Isc/A)	14.72	14.77	14.83
Module Efficiency (%)	22.58	22.77	22.95

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m, Cell Temperature 25°C

<b>ELECTRICAL PARAMETERS (NMOT)</b>			
Max Power (Pmax/W)	455.32	459.16	462.92
Max Power Voltage(Vmp/V)	41.62	41.78	41.97
Max Power Current (Imp/A)	10.94	10.99	11.03
Open Circuit Voltage(Voc/V)	49.34	49.57	49.77
Short Circuit Current (Isc/A)	11.88	11.92	11.97

NMOT(Nominal Module Operating Temperature): Irradiance 800W/m, Ambient Temperature 20°C, Wind Speed 1m/s

<b>BIFACIAL GENERATION DATA (620W FOR EXAMPLE)</b>			
Power Gain	5%	15%	25%
Maximum Power (W)	651.13	713.27	774.96
Module Efficiency (%)	24.11	26.41	28.69
Max Power Voltage(Vmp/V)	45.03	45.03	45.03
Max Power Current(Imp/A)	14.46	15.84	17.21
Open Circuit Voltage(Voc/V)	53.22	53.22	53.22
Short Circuit Current(Isc/A)	15.57	17.05	18.54

Bifacial generation varies relying on albedo, height from ground, interval etc. Below data are for reference only.




<b>TEMPERATURE CHARACTERISTICS</b>	
Cell Operating Temperature	45±2°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Voc	-0.248%/°C
Temperature Coefficient of Pmax	-0.300%/°C

<b>MECHANICAL PARAMETERS</b>			
Cell Type	N Type/MBB/Monocrystalline/Half-Cell		
Number of Cells	144		
Weight	34±1kg		
Dimension	2382×1134×30mm		
Front Glass	Semi-tempered embossed coated glass	Frame	Anodized Aluminum
Encapsulating Material	EVA/POE+POE	Junction Box	Protection Degree IP68
Back Glass	Semi-tempered embossed/high-reflection	Cable	4.0mm² / + 350mm, - 250mm; or customized length

<b>OPERATING CONDITIONS</b>			
Maximum System Voltage	1500V	Max Front Face Static Load (Snow etc)	5400Pa
Operating Temperature	-40°C~+85°C	Max Rear Face Static Load (Wind etc)	2400Pa
Maximum Series Fuse Rating	30A	Installation should strictly obey the installation manual of Solargiga Energy	

<b>PACKING INFORMATION</b>	
36pcs/pallet	720pcs/40'HQ

\*Power test uncertainty +/-3%

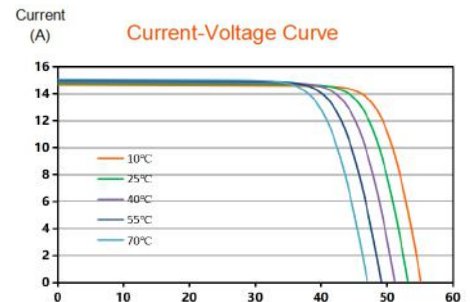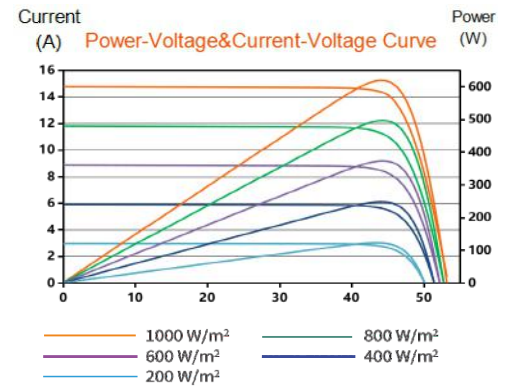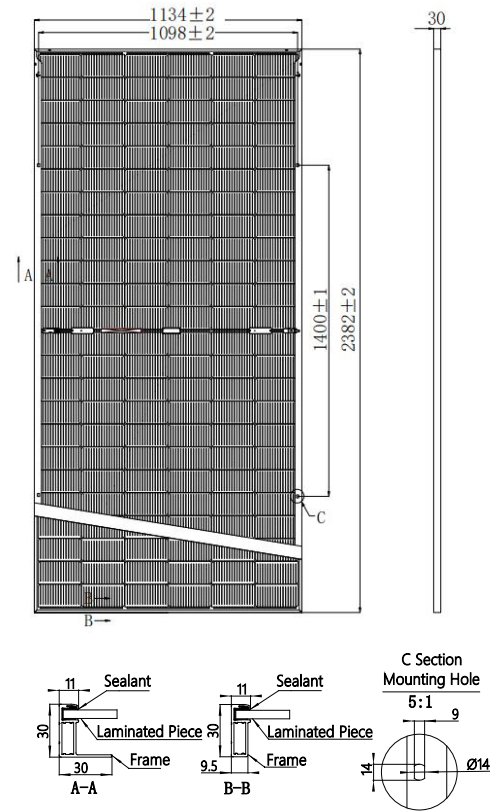

Sales HOT-line : +86 0416 508 1599  
E-mail : sales@jz.solargiga.com  
Xihai Industry Park, Economic and  
Technical Development Zone,  
Jinzhou , Liaoning Province,China.

**Note :** Electrical parameters are only used for comparison between different types of modules. Due to product innovation , Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.

