

Solargiga Energy

Giga Sup7

JMPV-XVT6/66-600(R)

JMPV-XVT6/66-605(R)

JMPV-XVT6/66-610(R)

JMPV-XVT6/66-615(R)

MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

Maximum Power | Maximum Efficiency

615W

22.8%



CELL TYPE

N-Type/MBB/Monocrystalline/Half-Cell



HIGH EFFICIENCY, HIGH GENERATION

Based on monocrystalline silicon wafer and TOPCon cell technology, the power generation efficiency has greatly improved with lower degradation and better temperature coefficient.



SUPPORT 1500Vdc SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.



STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.



IEC 61215/ IEC 61730

IEC 60068-2-68 : Dust and Sand Test


*IEC 61215/61730 certificate holder: Jinzhou Yangguang Energy Co., Ltd.

12 YEARS

Product Warranty

30 YEARS

Power Output Warranty*

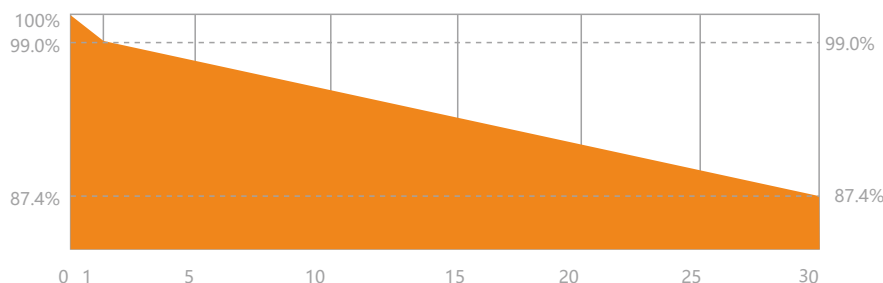

*Only applies to the actual power output of the front face of the modules under STC (Standard Test Condition).

PICC

ADDITIONAL PREMIUM INSURANCE
SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ('Solargiga Energy' , HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.




Website: www.solargiga.com

Made in China
DS-TS-2025V1.1

MBB MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

MODEL NUMBER	JMPV-XVT6/66-600(R)	JMPV-XVT6/66-605(R)	JMPV-XVT6/66-610(R)	JMPV-XVT6/66-615(R)
ELECTRICAL PARAMETERS (STC) STC(Standard Test Condition): AM1.5, Irradiance 1000W/m², Cell Temperature 25°C				
Max Power (Pmax/W)	600	605	610	615
Max Power Voltage(Vmp/Vdc)	40.22	40.39	40.56	40.73
Max Power Current (Imp/Adc)	14.92	14.98	15.04	15.10
Open Circuit Voltage(Voc/Vdc)	48.18	48.36	48.54	48.75
Short Circuit Current (Isc/Adc)	15.86	15.93	16.00	16.06
Module Efficiency (%)	22.2	22.4	22.6	22.8
ELECTRICAL PARAMETERS (BNPI) BNPI(Bifacial Nameplate Irradiance): AM1.5, Irradiance 1000W/m² (Front Face), Irradiance 135W/m²(Rear Face), Cell Temperature 25°C				
Max Power (Pmax/W)	663	669	674	680
Open Circuit Voltage(Voc/Vdc)	48.35	48.53	48.71	48.92
Short Circuit Current (Isc/Adc)	17.55	17.62	17.70	17.77
Bifaciality coefficient: ΦVoc=(99±5)%, ΦIsc=(80±10)%, ΦPmax=(80±10)%				
ELECTRICAL PARAMETERS (BSI) BSI(Bifacial Stress Irradiance): AM1.5, Irradiance 1000W/m² (Front Face), Irradiance 300W/m²(Rear Face), Cell Temperature 25°C				
Short Circuit Current (Isc/Adc)	19.67	19.75	19.84	19.91
BIFACIAL GENERATION DATA (615W FOR EXAMPLE) Bifacial generation varies relying on albedo, height from ground, interval etc. Below data are for reference only.				
Power Gain	5%	15%	25%	
Maximum Power (W)	645.97	707.48	768.98	
Module Efficiency (%)	23.9	26.2	28.5	
Max Power Voltage(Vmp/Vdc)	40.73	40.73	40.73	
Max Power Current(Imp/Adc)	15.86	17.37	18.88	
Open Circuit Voltage(Voc/Vdc)	48.75	48.75	48.75	
Short Circuit Current(Isc/Adc)	16.86	18.47	20.08	
TEMPERATURE CHARACTERISTICS				
Cell Operating Temperature	45±2°C			
Temperature Coefficient of Isc	0.047%/°C			
Temperature Coefficient of Voc	-0.240%/°C			
Temperature Coefficient of Pmax	-0.290%/°C			
MECHANICAL PARAMETERS				
Cell Type	N Type/MBB/Monocrystalline/Half-Cell			
Number of Cells	132(6×11×2)			
Weight	34±1.0kg	Dimension	2382×1134×30mm	
Power Sorting Tolerance	0~+5W	Fire Rating	Class C	
Front Glass	Semi-tempered embossed coated glass	Frame	Anodized Aluminum	
Encapsulating Material	EVA/POE+POE	Junction Box	Protection Degree IP68	
Back Glass	Semi-tempered embossed/high-reflection	Cable	4.0mm²/+300mm, - 200mm or customized length	
OPERATING CONDITIONS				
Maximum System Voltage	1500Vdc	Max Front Face Static Load (Mechanical test load)	5400Pa	
Work Environment Temperature#	-40°C~+85°C	Max Rear Face Static Load (Mechanical test load)	2400Pa	
Maximum Series Fuse Rating	30Adc	Installation should strictly obey the installation manual of Solargiga Energy		
PACKING INFORMATION				
36pcs/pallet	720pcs/40'HQ			

*Measurement tolerances: Pmax: ±3%; Voc: ±3%; Isc: ±5%; #T98(Max):70°C

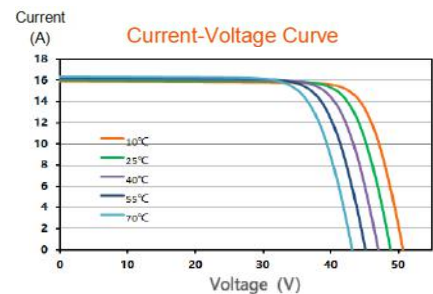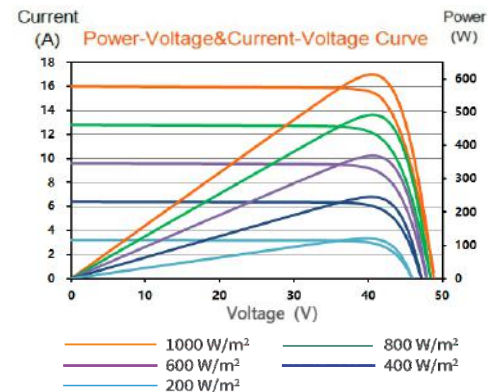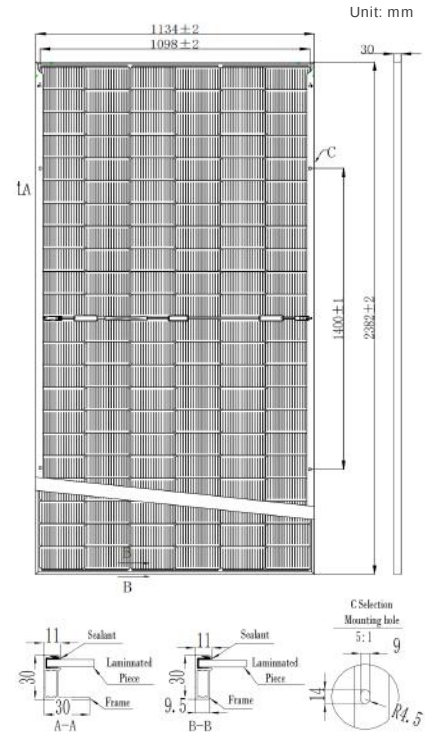

Connector Manufacturer and Model	
Manufacturer	Model
JINZHOUYANGGUANG	C1xyz
Holysun	C1xyz/C2xyz
Minghe	PV-MH5



Sales HOT-line : +86 0416 508 1599
 E-mail : sales@jz.solargiga.com
 Xihai Industry Park, Economic and
 Technical Development Zone,
 Jinzhou , Liaoning Province,China.

Note : Electrical parameters are only used for comparison between different types of modules. Due to product innovation , Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.



Made in China
 DS-TS-2025V1.1