

# Solargiga Energy

## Giga Sup7

JMPV-XV6/78-630(R)  
JMPV-XV6/78-635(R)  
JMPV-XV6/78-640(R)  
JMPV-XV6/78-645(R)

MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

Maximum Power	Maximum Efficiency	Power Tolerance
<b>645W</b>	<b>23.1%</b>	<b>0~+3%</b>



### CELL TYPE

N-Type/MBB/Monocrystalline/Half-Cell



### HIGH EFFICIENCY, HIGH GENERATION

Based on monocrystalline silicon wafer and TOPCon cell technology, the power generation efficiency has greatly improved with lower degradation and better temperature coefficient.



### SUPPORT 1500Vdc SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.



### STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.



IEC 61215 / IEC 61730

IEC 60068-2-68 : Dust and Sand Test


\*IEC 61215/61730 certificate holder: Jinzhou Yangguang Energy Co., Ltd.

**12 YEARS**

Product Warranty

**30 YEARS**

Power Output Warranty

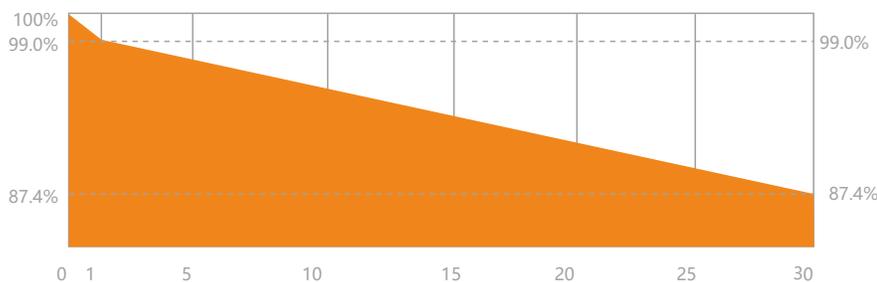

**PICC**

ADDITIONAL PREMIUM INSURANCE  
SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ('Solargiga Energy', HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.

Website: [www.solargiga.com](http://www.solargiga.com)

Made in China

DS-TS-2025V1.2

# MBB MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

MODEL NUMBER	JMPV-XV6/78-630(R)	JMPV-XV6/78-635(R)	JMPV-XV6/78-640(R)	JMPV-XV6/78-645(R)
<b>ELECTRICAL PARAMETERS (STC)</b>				
Max Power (Pmax/W)	630	635	640	645
Max Power Voltage(Vmp/Vdc)	46.86	47.04	47.22	47.40
Max Power Current (Imp/Adc)	13.45	13.51	13.57	13.61
Open Circuit Voltage(Voc/Vdc)	57.00	57.22	57.44	57.62
Short Circuit Current (Isc/Adc)	14.05	14.11	14.17	14.22
Module Efficiency (%)	22.5	22.7	22.9	23.1

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C

<b>ELECTRICAL PARAMETERS (BNPI)</b>				
Max Power (Pmax/W)	696	702	709	713
Open Circuit Voltage(Voc/Vdc)	57.20	57.42	57.69	57.82
Short Circuit Current (Isc/Adc)	15.54	15.61	15.70	15.73

Bifaciality coefficient: Voc=(99±5)%, Isc=(80±10)% , Pmax=(80±10)%

BNPI(Bi-facial Nameplate Irradiance): AM1.5, Irradiance 1000W/m<sup>2</sup>(Front Face), Irradiance 135W/m<sup>2</sup>(Rear Face), Cell Temperature 25°C

<b>BIFACIAL GENERATION DATA (645W FOR EXAMPLE)</b>			
Power Gain	5%	15%	25%
Maximum Power (W)	677.35	741.81	806.27
Module Efficiency (%)	24.3	26.7	28.9
Max Power Voltage(Vmp/Vdc)	47.40	47.40	47.40
Max Power Current(Imp/Adc)	14.29	15.65	17.01
Open Circuit Voltage(Voc/Vdc)	57.62	57.62	57.62
Short Circuit Current(Isc/Adc)	14.93	16.35	17.78





<b>TEMPERATURE CHARACTERISTICS</b>	
Cell Operating Temperature	45±2°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Voc	-0.240%/°C
Temperature Coefficient of Pmax	-0.290%/°C

<b>MECHANICAL PARAMETERS</b>			
Cell Type	N Type/MBB/Monocrystalline/Half-Cell		
Number of Cells	156(6×13×2)		
Weight	34.6±1kg	Dimension	2465×1134×30mm
Power Sorting Tolerance	0~+5W	Fire Rating	Class C
Front Glass	Semi-tempered embossed coated glass	Frame	Anodized Aluminum
Encapsulating Material	EVA/POE	Junction Box	Protection Degree IP68
Back Glass	Semi-tempered embossed/high-reflection	Cable	4.0 mm <sup>2</sup> /+300mm, -200mm ; or customized length

<b>OPERATING CONDITIONS</b>			
Maximum System Voltage	1500Vdc	Max Front Face Static Load (Mechanical test load)	5400Pa
Work Environment Temperature	-40°C~+85°C	Max Rear Face Static Load (Mechanical test load)	2400Pa
Maximum Series Fuse Rating	30Adc	Installation should strictly obey the installation manual of Solargiga Energy	

<b>PACKING INFORMATION</b>	
36pcs/pallet	576pcs/40'HQ

\*Measurement tolerances : Pmax: ±3% ; Voc: ±3% ; Isc: ±5%

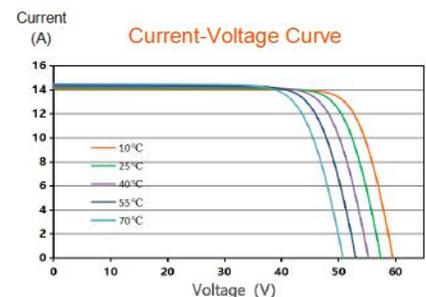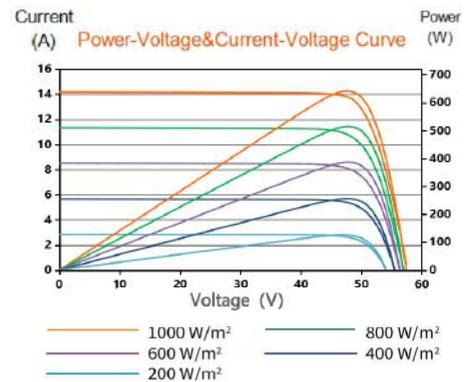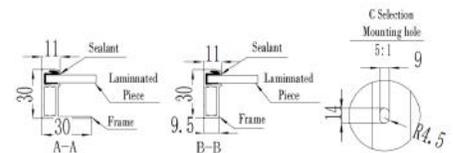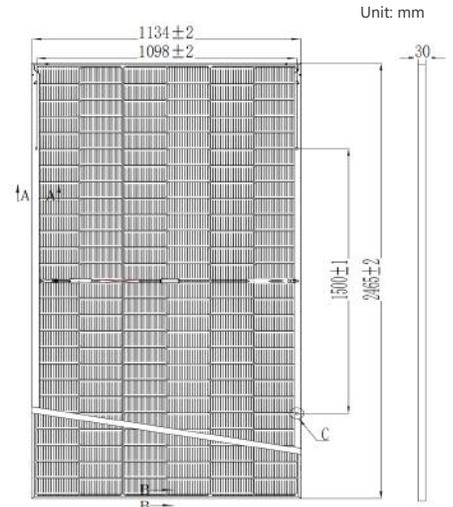

Connector Manufacturer and Model	
Manufacturer	Model
Jinzhou Yangguang	C1xyz
Holysun	C2xyz



Sales HOT-line : +86 0416 508 1599  
 E-mail : sales@jz.solargiga.com  
 Xihai Industry Park, Economic and  
 Technical Development Zone,  
 Jinzhou , Liaoning Province,China.

**Note :** Electrical parameters are only used for comparison between different types of modules. Due to product innovation , Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.

